



#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization International Bureau

# NIPO PMPI

### - 1 1000 0 1000 0 10 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0 100 0

(43) International Publication Date 24 June 2004 (24.06.2004)

**PCT** 

## (10) International Publication Number WO 2004/052604 A1

(51) International Patent Classification7:

B28B 7/36

(21) International Application Number:

PCT/FI2003/000936

(22) International Filing Date: 8 December 2003 (08.12.2003)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data: 20022173

10 December 2002 (10.12.2002) F

(71) Applicant and

(72) Inventor: NAAMANKA, Janne, Samuli [FI/FI]; Löylytie 18, FIN-02770 Espoo (FI).

(74) Agent: LAITINEN, Pauli, S.; Patentti-Laitinen OY, P.O. Box 29, FIN-02771 Espoo (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD FOR CREATING A NON-POROUS FAIR-FACE SURFACE WHEN CASTING CONCRETE

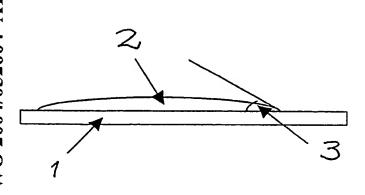

(57) Abstract: A method for creating a non-porous fair-face surface when casting concrete, in which method a casting membrane is used between the concrete being cast and the formwork. The casting membrane is formed at least on the plastic coating lying against the concrete being cast, which coating is treated with an electric-discharge treatment.

WO 2004/052604 A1